

## STUDY AND PATTERN OF PACKING CIRCULAR SOLID USED IN DIESEL MOTOR

**M.SUDHIRKUMAR**

PG Scholar,  
Dr. S.G.I.T,  
Markapuram (Dist), A.P

**D. MURALIDHAR YADAV**

M. Tech (Machine Design), M.I.S.T.E,  
Associate Professor, Dr. S.G.I.T,  
Markapuram (dist), A.P

### **Abstract :-**

*A CircularSolid liner is a cylindrical part to be fitted in to an Motor block to form a cylindrical space in which the piston reciprocates very smoothly. It is one of the most important functional parts to make up the interior of an Motor. Generally CircularSolid liners are made of Cast Iron, Cast steel, Nickel CI, Nickel chrome CI. The aim of this project is to design and analyze a Packing CircularSolid liner for Hino-X diesel Motors. A Hino – X Motor CircularSolid Packing liner used in one of Ashok Leyland model manufactured by The amount of heat generated, heat transfer rate of the component, temperature produced inside the CircularSolid are to be calculated using ANSYS analysis package. Various surface coatings like ceramic, aluminum alloys and Nickel chrome alloy steel are used to study the, heat flux, , thermal stresses, thermal displacement, thermal gradient ,nodal temperatures of the CircularSolid liner. Modeling is done in Pro/Motorer and analysis is done coupled field analysis in ansys. After comparing the results, the best coated CircularSolid Packing liner for this type of diesel Motor can be suggested.*

### **INTRODUCTION**

The CircularSolid liner forms the cylindrical space in which the piston reciprocates. The reasons for manufacturing the liner separately from the CircularSolid block (jacket) in which it is located are as follows; The liner can be manufactured using a superior material to the CircularSolid block. While the CircularSolid block is made from a grey cast iron, the liner is manufactured from a cast iron alloyed with chromium, vanadium and molybdenum. (cast iron contains graphite, a lubricant. The alloying elements help resist corrosion and improve the wear resistance at high, temperatures.)The CircularSolid liner will wear with use, and therefore may have to be replaced. The CircularSolid jacket lasts the life of the Motor. At working temperature, the liner is a lot hotter than

the jacket. The liner will expand more and is free to expand diametrically and lengthwise. If they were cast as onepiece, then unacceptable thermal stresses would be set up, causing fracture of the material To increase the power of the Motor for a given number of CircularSolids, either the efficiency of the Motor must be increased or more fuel must be burnt per cycle. To burn more fuel, the volume of the combustion space must be increased, and the mass of air for combustion must be increased. Because of the resulting higher pressures in the CircularSolid from the combustion of this greater mass of fuel, and the larger diameters, the liner must be made thicker at the top to accommodate the higher hoop stresses, and prevent cracking of the material. If the thickness of the material is increased, then it stands to reason that the working surface of the liner is going to increase in temperature because the cooling water is now further away. Increased surface temperature means that the material strength is reduced, and the oil film burnt away, resulting in excessive wear and increased thermal stress.


### **CIRCULARSOLID IN IC MOTOR**

The CircularSolid of an I.C. Motor acts as the structural member and retains the working fluid in a closed space with movable piston wall. It is tested to high explosive pressure, which is approximately 3-8 times the maximum compression pressure and high temperature ranging between 1800K and 2400K. Thus the CircularSolid of an I.C. Motor should be able to withstand high working pressure and should be able to transfer heat efficiently without thermal distortion taking place. For small Motors operating at low speed, the CircularSolid block is cast


as one piece. However for large Motors a separate CircularSolid liner is used. It facilitates easy repair or replacement of the liner in the event of wear and tear of the CircularSolid.

### CIRCULARSOLID LINER

A CircularSolid liner is a cylindrical part to be fitted into an Motor block to form a CircularSolid. It is one of the most important functional parts to make up the interior of an Motor. This is called CircularSolid liner in Japan, but some countries(or companies) call this CircularSolid sleeve. CircularSolid liners are generally made of closed grained pearlitic cast iron, nickel CI, nickel-chrome CI, cast steel and forged alloy steel. The inner surface of the liner is heat treated to obtain a hard and smooth surface. The basic dimensions of the CircularSolid liner are determined on the basis of strength and rigidity to prevent ovalization of the liner during assembly and operation. The dimensions should conform to IS:6750 – 1972. A CircularSolid liner should be designed and/or checked in the following modes of failure:

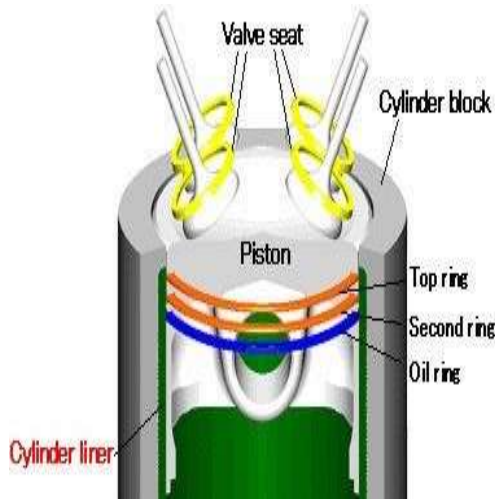

Fig; 1 Cross-section of a CircularSolid in an internal

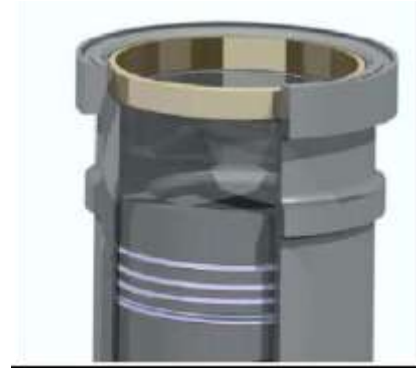

Fig; 2 CircularSolid with piston ,and CircularSolid liner combustion Motor

### NEED OF CIRCULARSOLID LINERS

The CircularSolid liner forms the cylindrical space in which the piston reciprocates. The reasons for manufacturing the liner separately from the CircularSolid block (jacket) in which it is located are as follows The liner can be manufactured using a superior material to the CircularSolid block. While the CircularSolid block is made from a grey cast iron, the liner is manufactured from a cast iron alloyed with chromium, vanadium and molybdenum. (cast iron contains graphite, a lubricant. The alloying elements help resist corrosion and improve the wear resistance at high temperatures.)The CircularSolid liner will wear with use, and therefore may have to be replaced. The CircularSolid jacket lasts the life of the Motor. At working temperature, the liner is a lot hotter than the jacket. The liner will expand more and is free to expand diametrically and lengthwise. If they were cast as one piece, then unacceptable thermal stresses would be set up, causing fracture of the material.

Less risk of defects. The more complex the casting, the more difficult to produce a homogenous casting with low residual stresses. The Liner will get tend to get very hot during Motor operation as the heat energy from the burning fuel is transferred to the CircularSolid wall. So that the temperature can be kept within acceptable limits the liner is cooled. CircularSolid liners from older lower powered Motors

had a uniform wall thickness and the cooling was achieved by circulating cooling water through a space formed between liner and jacket. The cooling water space was sealed from the scavenge space using 'O' rings and a telltale passage between the 'O' rings led to the outside of the CircularSolid block to show a leakage.

To increase the power of the Motor for a given number of CircularSolids, either the efficiency of the Motor must be increased or more fuel must be burnt per cycle. To burn more fuel, the volume of the combustion space must be increased, and the mass of air for combustion must be increased. Because of the resulting higher pressures in the CircularSolid from the combustion of this greater mass of fuel, and the larger diameters, the liner must be made thicker at the top to accommodate the higher hoop stresses, and prevent cracking of the material. If the thickness of the material is increased, then it stands to reason that the working surface of the liner is going to increase in temperature because the cooling water is now further away. Increased surface temperature means that the material strength is reduced, and the oil film burnt away, resulting in excessive wear and increased thermal stressing. The solution is to bring the cooling water closer to the liner wall, and one method of doing this without compromising the strength of the liner is to use tangential bore cooling. Holes are bored from the underside of the flange formed by the increase in liner diameter. The holes are bored upwards and at an angle so that they approach the internal surface of the liner at a tangent. Holes are then bored radially around the top of the liner so that they join with the tangentially bored holes. On some large bore, long stroke Motors it was found that the under cooling further down the liner was taking place. Why is this a problem? Well, the hydrogen in the fuel combines with the oxygen and burns to form water. Normally this is in the form of steam, but if it is cooled it will condense on the liner surface and wash away the lube oil film.

Fuels also contain sulphur. This burns in the oxygen and the products combine with the water to form sulphuric acid. If this condenses on the liner surface (below 140°) then corrosion can take place. Once the oil film has been destroyed then wear will take place at an alarming rate. One solution is to insulate the outside of the liner so that there was a reduction in the cooling effect.

### **TYPES OF CIRCULARSOLID LINERS**

Generally, two types of CircularSolid liners are used in I.C. Motors: Packing liners and wet liners. A CircularSolid liner does not come in direct contact with the cooling medium is called the Packing liner, whereas a wet liner comes in contact with the cooling medium. This type of liner is supported at two positions and a water jacket is formed between the liner and the CircularSolid block in which cooling water is circulated.

Packing CircularSolid Liners

Wet CircularSolid Liners

### **PACKING CIRCULARSOLID LINERS**

As shown in fig, this type of liner is made in the shape of a barrel with flange at the top which keeps it into position. The entire outer surface bears against the CircularSolid block casting and hence has to be machined very accurately both from the inside and the outside. It is put in position by shrinking the liner. This introduces some stresses due to shrinkage and hence the liner bore has to be machined accurately again after the liner has been put into the CircularSolid casting. Too loose a liner will result in poor heat dissipation because of absence of a good contact with the CircularSolid block. This will result in higher operating temperatures. If the lubrication is also deficient, it may cause scuffing. Too tight a liner is even worse than the too loose case. It produces distortion of CircularSolid block, liner cracking, hot spots and scuffing. Even if a correct liner is fitted in a CircularSolid block which itself is badly distorted, it will result in poor sealing action of rings if the liner is



thin because then it will also tend to adopt the shape of the distorted block in which it is fitted. Even if the liner is thick enough to resist change of shape, there will be some hot spots which will lead to scuffing on the inner surface of the liner.

### **ADVANTAGES OF PACKING LINERS**

1. There is no danger of water leakage either in to the crankcase or the combustion chamber.
2. Due to the absence of a heavy flange at the top of the liner, CircularSolid centers can be reduced.
3. There is better cooling of the upper part of the liner.

### **DISADVANTAGES**

1. Complicated casting
2. Decreased heat flow through the composite wall.

### **PACKING CIRCULARSOLID LINERS IN DIESELMOTORS**

In diesel Motors a Packing liner is used in which the liner barrel does not make direct contact with the cooling water. In the most common Packing liner, a flange is provided on the upper outer circumference in an axial direction and a grind relief groove is provided below the flange at the outer circumferential surface of the liner barrel. The Packing liner is inserted into the CircularSolid bore of the CircularSolid block and the flange is fastened along with the gasket, between the lower surface of the CircularSolid head and the upper surface of the CircularSolid block by tightening of the head bolts.

However, in recent years demand has steadily mounted for thin-walled Packing liners in order to make the Motor lighter and more compact. One critical problem that must be dealt with to meet this demand is reduction of tensile stress on the inner circumferential surface of the liner at the grind relief groove below the flange caused by repetitive stress induced by combustion pressure and piston slap during Motor operation.

The loose-fit type of the Packing liner, which has a gap between the inner

circumferential surface of the bore of the CircularSolid block and the outer circumferential surface of the liner, has the advantage that assembly and maintenance are easy, and no machining of the inner circumferential surface of the liner is needed after assembly. This advantage has caused the loose-fit type liner to see frequent use. During operation of an Motor with this type of liner, the liner expands from heat due to a temperature difference between the liner and the CircularSolid block, so that the outer circumferential surface of the liner barrel makes direct contact with the inner circumferential surface of the bore of the CircularSolid block. However, this liner also has the disadvantage in that when the liner temperature is low, a gap is present between the liner barrel and the bore of the CircularSolid block, making the liner barrel prone to deformation.

The tight-fit type of the Packing liner has no gap between the outer circumferential surface of the liner and the inner circumferential surface of the bore of the CircularSolid block and press-fit is carried out during assembly. However in the tight-fit type of the liner, a gap appears just as with the loose-fit type liner when deformation occurs in the CircularSolid block or the liner in the vicinity of the grind relief groove.

As prior technology for reducing tensile stress on the liner inner circumferential surface at the grind relief groove below the flange, there is for instance a proposal to provide partly press-fit portions below the grind relief groove (see Japanese Utility Model Laid-open No. 6-82466). However changing partly the dimension of the liner barrel is difficult for using conventional center less grinding.

### **Formation of sliding surface**

The CircularSolid liner, serving as the inner wall of a CircularSolid, forms a sliding surface for the piston rings while retaining the lubricant within. The most important function of CircularSolid liners is the excellent characteristic as sliding surface and these four necessary points.

- (1) High anti-galling properties, (2) Less

- wear on the CircularSolid liner itself
- (3)Less wear on the partner piston ring
- (4)Less consumption of lubricant

### Heat transfer

The Circular Solid liner receives combustion heat through the piston and piston rings and transmits the heat to the coolant.

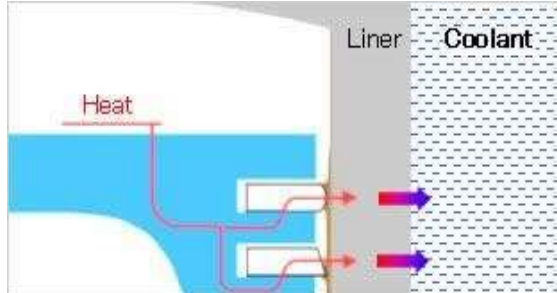


Figure 3 Heat transfer

### Compression gas sealing

The Circular Solid liner prevents the compressed gas and combustion gas from escaping outside.

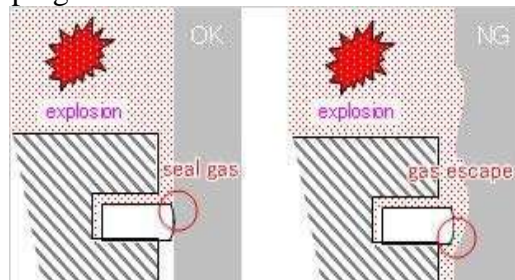


Figure 2 :Providing air tightness of CircularSolid liner It is necessary that a CircularSolid liner which is hard to transform by high pressure and high temperature in the CircularSolid.

A CircularSolid wall in an Motor is under high temperature and high pressure, with the piston and piston rings sliding at high speeds. In particular, since longer service life is required of Motors for trucks and buses, cast iron CircularSolids that have excellent wear-resistant properties are only used for CircularSolid parts. Also, with the recent trend of lighter Motors, materials for Motor blocks have been shifting from cast iron to aluminum alloys. However, as the sliding surface for the inner CircularSolid, the direct sliding motion of aluminum alloys has drawbacks in deformation during operation and wear-resistance. For that reason, cast iron CircularSolid liners are used in most

cases.

## MOTOR APPLICATIONS OF PACKING CIRCULARSOLID LINERS

CircularSolids liners are called several names in industry. It can also be referred to as sleeves. Thus, CircularSolid liners and CircularSolid sleeves are one and the same thing.

The barrel or bore that the piston moves up and down may be either integral with the Motor block, or be a completely replaceable separate item. Most diesel Motors come with replaceable CircularSolid liners. The most common agricultural tractor with a sleeveless or liner less Motors are some of the Ford / New Holland Motors. Most of the other, including, John Deere, Farmall, Allis Chalmers, IH, Case, David Brown, Massey Ferguson, Perkins, Cummins and Kubota are predominantly sleeved Motors.

The primary advantage of using a CircularSolid liner is that it will become damaged after the robust process of movement and combustions that occurs in it. At the top of the sleeve (in the combustion chamber) the temperature can be as much as 593 degrees Celsius (1100 Fahrenheit). The piston reciprocates in this CircularSolid liner at a speed of approximately 1800-5000 rpm, depending on Replaceable liners can be easily pressed out, and a new liner be pressed in. There is portable equipment to perform this pressing in and out right on the machine, without the need for transport to a machine shop. However, the larger diesel Motors will require removal from the machine and transport to the machine shop for full liner /sleeve replacement.

Another advantage of using sleeves / liners is that the Motor block can be manufactured with less expensive cast iron, while the liners are manufactured with special alloys, making it tougher, harder, and resistant to heat and wear. These added alloys can have chromium, nickel, or molybdenum.

Motors with the bore directly into the Motor block, like Ford Tractor Motors, are

referred to as "wet sleeves," as the coolant circulated directly onto it, being cooled by convection. The blocks with are referred to as "Packing sleeves" are cooled via conduction heat transfer.

After the initial wear and tear or operation, the Motor block itself is re-bored to a larger diameter to fit oversized pistons. With repeated re-boring, there comes a time where re-boring has reached its limits, and a replacement CircularSolid liner has to be bought and installed. Thus, a sleeveless Motor can be made into a sleeves Motor when necessary.

Ford Tractor Motors typically have liners fitted with a ridge or flange at the top. This acts as an added sealing feature, separating the water jacket from the combustion chamber and CircularSolid head

The sealing of the water jacket and from the CircularSolid head is also supported by using specially made o rings that can be fitted to the top and bottom of the liner, depending on application and Motor design.

#### 7. QUALITIES OF A GOOD PACKING CIRCULARSOLID LINER A good liner must possess the following qualities:

- Strength to resist the gas pressure
- Sufficiently hard to resist wear
- Strength to resist the thermal stresses due to the heat flow through the liner wall.
- Corrosion resisting.
- Capable of taking a good bearing surface.
- It should be symmetrical in shape to avoid unequal deflection due to gas load and unequal expansion due to thermal load.
- No distortion of the inner surface due to restraining fixings.

#### MATERIALS PACKING CIRCULARSOLID LINER

The liner material should be strong, hard and corrosion resistant and produce a good bearing surface. The liner materials in order of preference are:

1. A good grade grey cast iron

with homogenous and close grained structure, i.e., Perlitic and similar cast irons.

2. Nickel cast iron and Nickel chromium cast iron

3. Nickel-chromium cast steel with molybdenum in some cases.

The cast iron liners can be centrifugally cast. In large Motors, usually the cast steel CircularSolids are used, but may be with cast iron liners. For air-craft Motors, the liners are often turned of alloy steel forgings to get very light CircularSolids.

#### LINER DISTORTION

CircularSolids, CircularSolid blocks and liners should be designed so as to reduce the distortion to a minimum. The liner distortion can be produced due to the following reasons:

Due to temperature stresses: As indicated above, a compressive stress is induced on the inside and a tensile stress is indeed on the outside of the wall. Any defect in the casting on the liner wall will change the stress distribution and the liner may go out of round. Similarly any ribs or bosses on the outer wall of the liner will impose local restraint on the liner wall, they bring under tensile stresses. A circumferential rib will try to distort the liner out of parallel while an axial rib will distort it out of round. Therefore ribs and bosses on the outer wall of the liner should be avoided as far as possible.

1. Distortion may also occur due to the axial expansion of the liner. Due to this reason, one end should be left free.

2. Distortion is also caused by the gas pressure.

3. Distortion may also be caused by bolting on the CircularSolid head or any other part.

4. Distortion due to fixing, especially at the lower water joint. Here rubber rings are used and it is not compressible, if it is pushed out of shape, it must have room to move.

#### COMPARISON OF PACKING AND WET CIRCULARSOLID LINERS:

1. Packing type liners may be provided either in the original design or

even afterwards, whereas the wet type have to be included in the original CircularSolid design.

2. A leak proof joint between the CircularSolid casting and the liner has to be provided in case of wet pipe, whereas there is no such requirement in the case of Packing liners.

3. A CircularSolid block with Packing liners is generally more robust than a block with wet liners.

4. In case of a CircularSolid block with siamesed adjacent CircularSolid bores (i.e., without any coolant passage between the adjacent bores for reducing the overall CircularSolid length), only Packing liners can be used.

5. In case of wet liners, the casting of CircularSolid block is very much simplified

6. Better CircularSolid cooling is ensured in the case of wet liners because the coolant is in direct contact with the liner in this case. Besides better outside surface finish and more uniform wall thickness of the wet liner improves both the heat conduction and the uniformity of CircularSolid cooling.

7. Packing type cannot be finished finally before they are fitted to the CircularSolid block because of the shrinkage stresses produced, whereas wet type can be finished before fitting.

8. For perfect contact between the liner and the block casting in case of Packing liners, very accurate machining of both the block and the outer liner surfaces is required, whereas no such necessity is there for wet liners.

## 8. INTRODUCTION TO PRO-MOTORER

Pro-MOTORER Wildfire is the standard in 3D product design, featuring industry-leading productivity tools that promote best practices in design while ensuring compliance with industry and company standards. Integrated Pro-Motorer / CAD/CAM/CAE solutions allow to design faster than ever, while maximizing innovation and quality to ultimately create exceptional products.

Customer requirements may change and time pressures may continue to mount, but product design needs remain the same - regardless of project's scope, need the powerful, easy-to-use, affordable solution that Pro-MOTORER provides.

## PRO-MOTORER WILDFIRE BENEFITS

Unsurpassed geometry creation capabilities allow superior product differentiation and manufacturability. Fully integrated applications allow us to develop everything from concept to manufacturing within one application. Automatic propagation of design changes to all downstream deliverables allows you to design with confidence. Complete virtual simulation capabilities enable to improve product performance and exceed product quality of goals. Automated generation of associative tooling design, assembly instructions, and machine code allow for maximum production efficiency

Pro-MOTORER can be packaged in different versions to suit our needs, from Pro- MOTORER Foundation XE, to Advanced XE Package and Enterprise XE Package, Pro- MOTORER Foundation XE Package brings together a broad base of functionality. From robust part modeling to advanced surfacing, powerful assembly modeling and simulation, our needs will be met with this scaleable solution. Flex3C and Flex Advantage Build on this base offering extended functionality of choosing.

## DIFFERENT MODULES IN PRO-MOTORER

- PART DESIGN
- ASSEMBLY
- DRAWING
- SHEETMETAL


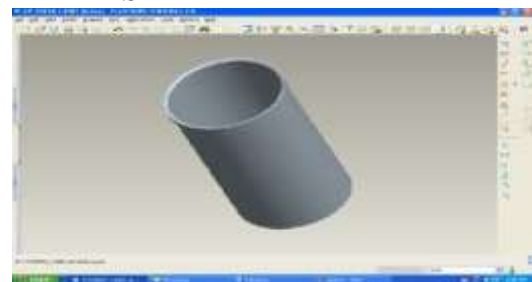


Fig 4 Packing CircularSolid Liner

**Without Fin**

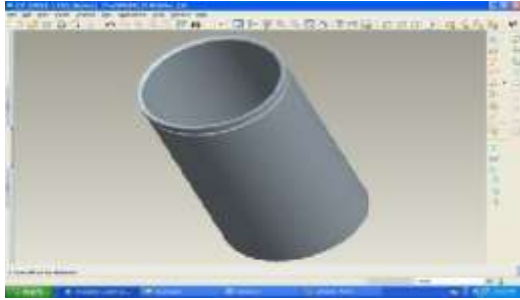

**Fig. 5 CircularSolid Liner With Fin (Inside CircularSolid)**

**9. INTRODUCTION TO ANSYS**

ANSYS is general-purpose finite element analysis (FEA) software package. Finite Element Analysis is a numerical method of deconstructing a complex system into very small pieces (of user- designated size) called elements. The software implements equations that govern the behaviour of these elements and solves them all; creating a comprehensive explanation of how the system acts as a whole. These results then can be presented in tabulated, or graphical forms. This type of analysis is typically used for the design and optimization of a system far too complex to analyze by hand. Systems that may fit into this category are too complex due to their geometry, scale, or governing equations.

ANSYS is the standard FEA teaching tool within the Mechanical Motorering Department at many colleges. ANSYS is also used in Civil and Electrical Motorering, as well as the Physics and Chemistry departments. ANSYS provides a cost-effective way to explore the performance of products or processes in a virtual environment. This type of product development is termed virtual prototyping.

**9.1 STEPS INVOLVED IN ANSYS**

In general, a finite element solution can be broken into the following these categories.

- 1. Preprocessing module:** Defining the problem The major steps in preprocessing are given below defining key points /lines/areas/volumes  
 - define element type and material /geometric

/properties - mesh lines/areas/volumes/are required The amount of detail required will depend on the dimensionality of the analysis (i.e. 1D, 2D, axis, symmetric)


**2. Solution processor module:**

assigning the loads ,constraints and solving. Here we specify the loads (point or pressure), constraints (translation, rotational) and finally solve the resulting set of equations.

**10. Coupled field analysis of CircularSolid liner coated and uncoated materials**

**I. UNCOATED PACKING CIRCULARSOLID LINER**


**Surface of Packing CircularSolid Liner**

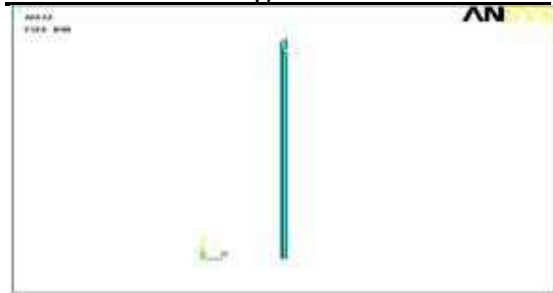

**Fig. 6 Surface of Packing CircularSolid Liner For Packing CircularSolid Liner – Cast Iron** Element Type: solid 20 nodes

90Material Properties: Thermal Conductivity – 25.2W/mk Specific Heat – 506 J/kg k Density 0.00000719kg/mm<sup>3</sup>  
 For Fin – **Aluminum Alloy 6101** Element Type: Solid 20 node 90 Material Properties: Thermal Conductivity – 220W/mk Specific Heat – 895 J/kg k Density - 0.0000027kg/mm<sup>3</sup> **Structural ANALYSIS**

**For CircularSolid Liner – Cast Iron**

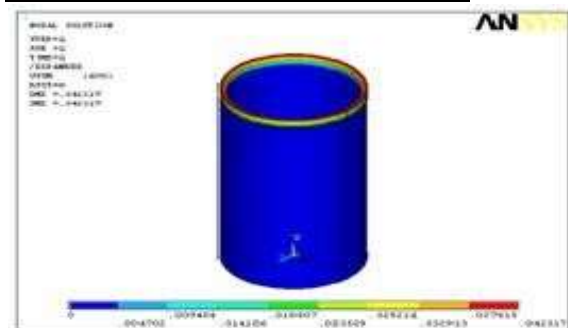

**Fig 7 Displacement**

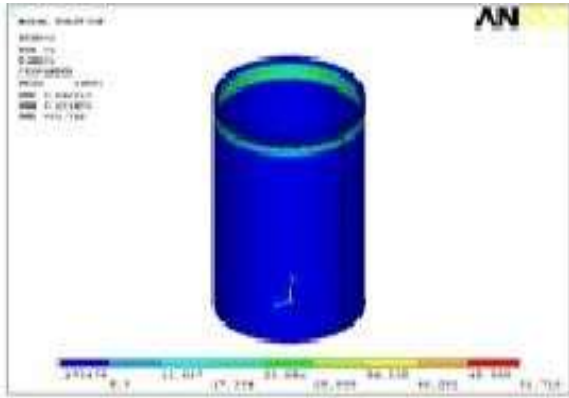


Fig 8 Von Mises Stress

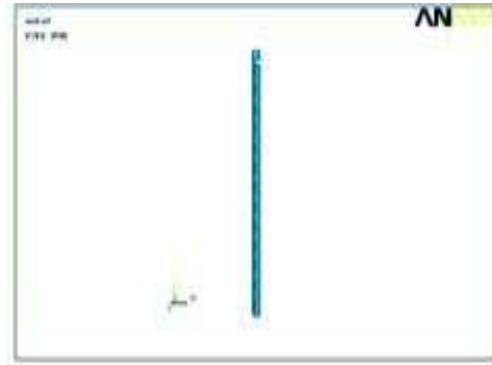


Fig 10 Surface of CircularSolid Liner cFig 10.6.Temperature

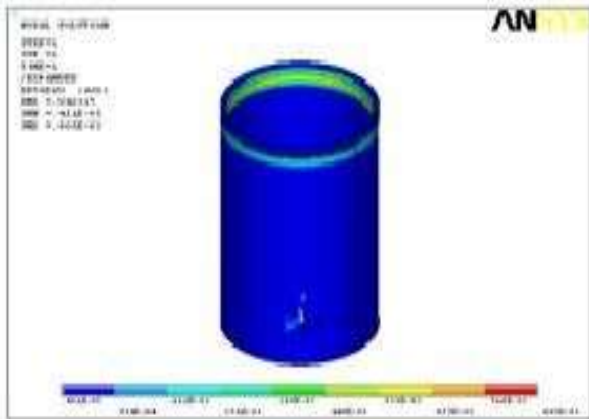


Fig 9 Strain


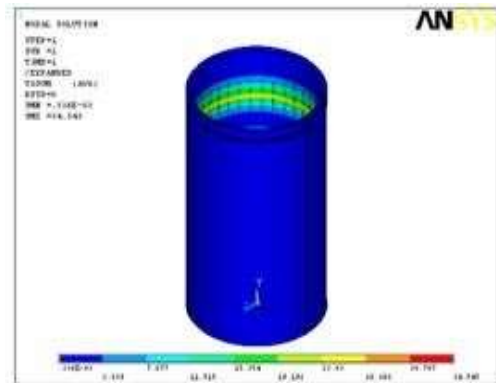


Fig 11 Thermal gradient

## II. COATED PACKING CIRCULARSOLID LINER

(A). CIRCULARSOLID LINER COATED WITH CERAMIC (PSZ)

### Surface of CircularSolid Liner

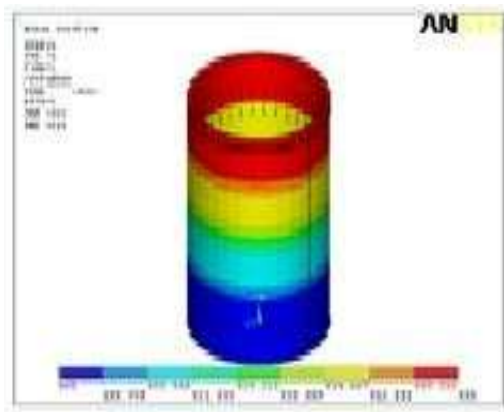

( B).CIRCULARSOLID LINER COATED WITH NICKELCHROME ALLOY STEEL

### Surface of CircularSolid Liner

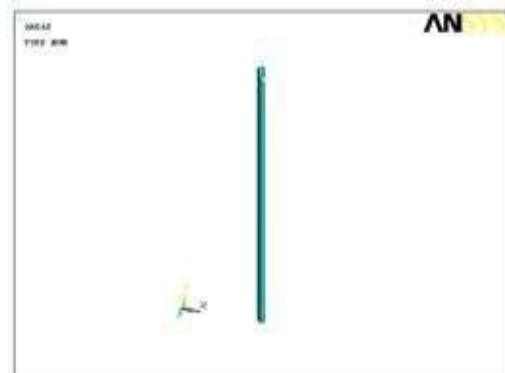


Fig 2 Surface of CircularSolid Liner

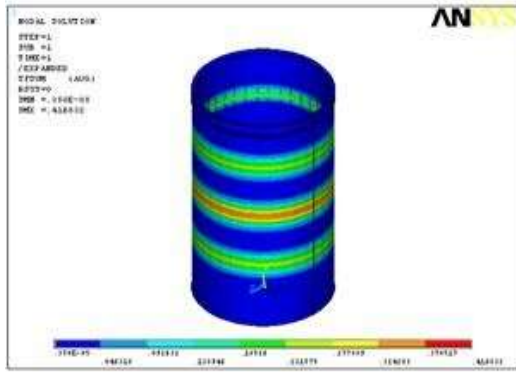


Fig 13 Thermal flux

### RESULTS

This chapter deals with the discussion of results on temperature distribution and comparison of the performance of various uncoated and coated Packing CircularSolid liner materials .

	Displacement (mm)	Von Mises Stress (N/mm <sup>2</sup> )	Strain	Nodal Temperature (K)	Thermal Gradient (K/mm)	Thermal Flux (W/mm <sup>2</sup> )
Without Coating	0.042317	51.716	0.805e <sup>-3</sup>	558	7.586	0.458192
PSZ Coating	0.045538	41.875	0.722e <sup>-3</sup>	558	34.545	0.282513
Al <sub>2</sub> O <sub>3</sub>	0.032518	38.31	0.473e <sup>-3</sup>	558	19.223	0.480566
Nickel Chrome Coating	0.035057	49.772	0.488 e <sup>-3</sup>	558	22.924	0.416832

*Magn. Magn. Mater.* **272-276**, 2029 (2004).

### CONCLUSION

After comparing the results, the best coated Circular Solid Packing liner for this type of diesel Motor can be suggested. In this Circular Solid liners with coating materials used, PSZ coating, Al<sub>2</sub>O<sub>3</sub>, Nickel Chrome materials. In this these three materials best material is Al<sub>2</sub>O<sub>3</sub>.

[6] *M.A. Marioni et al., J. Magn. Magn. Mater.* **290-291**, 35 (2005).

[7] *R.D. James, R. Tickle, M. Wuttig, Mater Sci Eng A* **273-275**, 320 (1999).

[8] *9. M.J. Dapino, Struct. Eng. Mech.* **17**, 303 (2004).

### REFERENCES

[1] *Brain, Marshall. "HowStuffWorks "Basic Motor Parts"". HowStuffWorks, Inc. Retrieved 3 May 2012.*

[2] *Kennett, Pat (June 1986). "The Cummins Beat". TRUCK (London, UK: FF Publishing Ltd): 54*

[3] *"Internal Combustion Motor". The Gale Encyclopedia of Science. Gale Group via Research. Retrieved 3 May 2012.*

[4] *Kennedy, Rankin (1912 edition of 1905 book.). The De Dion-Bouton Motor and Cars. The Book of Modern Motors and Power Generators. London: Caxton. pp. 78–89*

[5] *I. Suorsa, E. Pagounis, K. Ullakko, J.*