

A STUDY ON CRYOGENIC COOLING OF CUTTING FLUIDS IN LUBRICATION**K.PRAVEEN**Asst.Prof Thermal (Or) Ic Engines
Dept Of Mech
GDMM CET, Nandigama**K.GURU MURTHY**Asst.Prof Thermal (Or)Ic Engines
Dept Of Mech
GDMM CET, Nandigama**ABSTRACT**

Cutting fluid is a type of coolant and lubricant designed specifically for metalworking processes, such as machining and stamping. There are various kinds of cutting fluids, which include oils, oil-water emulsions, pastes, gels, aerosols (mists), and air or other gases. They may be made from petroleum distillates, animal fats, plant oils, water and air, or other raw ingredients. Depending on context and on which type of cutting fluid is being considered, it may be referred to as cutting fluid, cutting oil, cutting compound, coolant, Use of cutting fluids in machining processes can reduce the cutting temperature and provides lubrication to tool and work piece. These translate to longer tool life and improved surface quality. Metalworking fluids are a major cause of health hazards for operators apart from being sources of environmental pollution thus necessitating research in dry and minimum quantity lubrication (MQL) machining. The introduction of coolant techniques such as near-dry machining so called minimum quantity lubrication (MQL) and cryogenic coolant have shown promising performances especially in terms of cutting tool life. Nowadays, MQL is widely used in machining performances.

Keywords: Minimal quantity lubrication, ionic liquids, lubricants and machine.

1. Introduction

The various condition of machining which are dry machining near dry machining so called minimum quantity lubrication (MQL) and cryogenic machining. In recent years, there are many researchers that have been doing researches about MQL technique.

In 2002, over two billion gallons of cutting fluids were used by North American manufacturers. Traditionally, cutting fluids

have been widely used in machining operations in efforts to increase cooling and lubricity, and as a result enhance tool life, reduce process variability, etc. However, over the last decade, it has become apparent that fluid-related decisions have all too frequently been based upon industrial folklore rather than knowledge-based quantitative evidence. The earliest cooling lubrication approach in grinding is flood grinding, in which large amount of grinding fluid is poured as a continuous feed flow into the grinding wheel and work piece interface. The excellent characteristic lubrication of grinding fluid enables it to form an oil film on the work piece surface and reduce frictional coefficient and grinding force between the grinding wheel and the work piece.

Grinding fluid also aids in lubricating, washing, removing debris, and rust protection. However, the increasing extensive application of grinding fluid results in considerable application costs. Moreover, leakage and volatilization of grinding fluid cause pollution and inflict hazards to the environment and the human body. Therefore,

a cooling lubrication approach is necessary for ecological and clean production grinding process. Dry grinding is the earliest environmentally friendly grinding processing technique. Given that grinding fluid is not used, the technique is evidently more environment-friendly; however, the massive heat from grinding

cannot be dispersed from the grinding surface instantly. Thus, the heat delivered to the grinding wheel and work piece base through the grinding surface results in a locally high temperature on the work piece surface and even burns. This phenomenon, which is mainly due to insufficient cooling and lubrication on the grinding surface, eventually causes poor work piece surface quality and short grinding wheel service life.

2. Minimal Quantity Lubrication

MQL machining applies MWF in the form of mist with compressed air and delivers it through spindle to the tool work piece interface for maximal lubrication and cooling. Compared to traditional wet processes, MQL requires only 10-100 mL/h which dependent on the particular cutting operations.

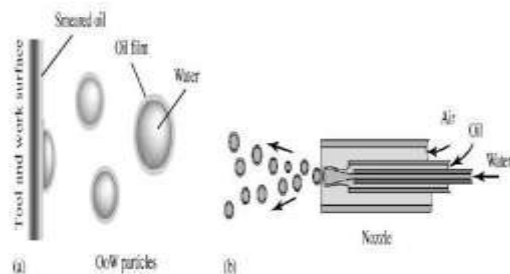


Figure 1: Principle of oil film on water droplets

Fundamental research in milling, turning, and drilling has confirmed that MQL can perform equally or even better than the wet condition in medium range of cutting processes, such as milling, shallow drilling on aluminum, cast iron, etc. However due to thermally-induced problems, it is still technically challenging for high-speed, high-energy cutting, such as grinding, deep-hole drilling, particularly for hard-to machine metals like compacted graphite iron (CGI), titanium alloys, and nickel-based alloys. To enable 100% implementation of MQL, automotive industry has started more proactively engaging in the MQL research and collaboration with academic institutes for developing the next-generation production processes. Cutting fluids have traditionally been used in machining operations to lubricate the chip-tool and tool-workpiece interfaces, remove heat from the workpiece and cutting zone, flush away chips from the cutting area, and inhibit corrosion (Shaw, 1942). While each of these four functions can be employed as justification for cutting fluid usage, it is widely believed that the primary functions of a cutting fluid are lubrication and cooling. Seminal contributions to the technical literature in support of this belief are provided below

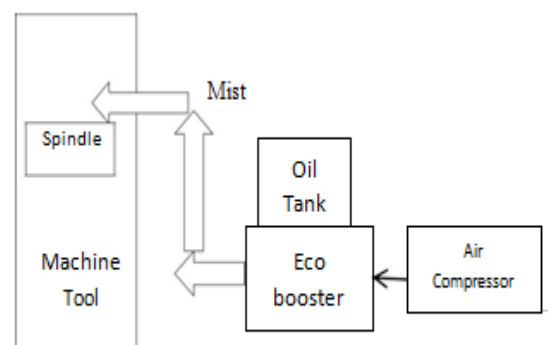


Figure 2: Block diagram for MQL System

Industrial experiences have concluded the advantages of MQL in power consumption, environment emission, waste; chips recycle value, safety, and flexibility as well as the major challenges including thermal issues expansion, wear, and firing, tool development through spindle/tool, and chips removal. The information is well-known in industry but rarely distributes to the academia and general population. As such, this paper aims to summarize the knowledge about the current status and future directions of MQL based on both industrial experience and academic studies in public domain.

3. Related Work

Hui Xing et al. in their paper predict and analyze accurately the lubrication characteristics and its influencing factors of marine sterntube bearings, coupling simulation between EHD (elastohydrodynamics) and MBD (multi-body dynamics) for sterntube bearings of marine diesel engine propulsion system. They found that the sterntube bearings were safe enough for normal operation; the vertical load and the total friction power loss on aft sterntube bearing were significantly higher than that of fore sterntube bearing.[1]

Dallwoo Kim et al. studied the friction of steel and cast iron pistons using the floating liner method. The secondary motion of each piston was carried out to analyze piston friction, and they found that the cast iron piston showed boundary lubrication at compression top dead center (TDC), caused by the larger tilting angle of the piston induced by the larger piston clearance and hydrodynamic lubrication conditions at TDC and BDC through each

cycle were seen in case of steel piston, due to a good oil supply.[2]

Danilo de Jesus Oliveira et al. analyzed that the application of minimum quantity lubrication (MQL) in grinding has emerged as an alternative for reducing the abundant flow of cutting fluids, thus achieving cleaner production. He found that the effects of implementing the cleaning jet technique as a technological improvement of minimum quantity lubrication in grinding in order to reduce the usage of cutting fluids were positive and also reduced wheel wear when compared to the other cooling-lubrication methods.[3]

Salmiah Kasolang et al. had a study on pressure distribution around the circumference of a journal bearing and fluid frictional force of the bearing caused by shearing actions and the observations told that the location of the maximum pressure for the given operating conditions is close to the predicted value.[4]

M. De La Cruz Et Al. analyzed that Noise, vibration and harshness (NVH) refinement as well as thermo-mechanical efficiency are the key design attributes of modern compact multi-speed transmissions. He further analyzed that the thermo-mechanical efficiency is dominated by the engaged gears, with simultaneous meshing of teeth pairs subject to thermo-elastohydrodynamic regime of lubrication, with often quite thin films, promoting asperity interactions. [5]

Guy Bayada et al. studied that Stokes equation with pressure dependence of viscosity through Barus law, a new

Reynolds model for line contact lubrication problems can be deduced, in which the cavitation phenomenon can also be considered and thus a new complete model consists of a nonlinear free boundary problem can be associated to the proposed new Reynolds equation.[6]

Evelyn George et al. observed that retention of lubricant during sliding of mating surfaces is one of the major problem faced in components of industry and the engine efficiency is affected by the frictional losses in engine liner-piston ring interface. Good lubrication can be achieved by making oil pockets on component surface, which leads to mixed lubrication regime.[7]

X.Y.Dong et al. studied the behavior of antifriction and wear resistance of Al₂O₃/Al₂O₃ ceramic friction pairs lubricated by four different lubrication oils under ultrasonic vibration and found that ultrasonic vibration would improve the behavior of antifriction and wear resistance of the Al₂O₃/Al₂O₃ ceramic friction pairs under various lubrication oils moreover the improving would be dramatizer when the viscosity of lubrication oil was low.[8]

Z.H. Nazri et al. observed that the bio-based lubricant has a great potential as a substitute for conventional lubricant in industries and the results show that at constant speed, the mineral oil exhibits higher value of dynamic pressure than the bio-based lubricant and also the mineral oil carried more load compared to bio-based lubricant and finally concluded that the bio-based lubricant exhibits significant behavior in protecting the surfaces from wear and damage.[9]

M. Shahabuddin et al. investigated the friction and wear characteristics of Jatropa oil based bio lubricant and observed that the addition of 10% jatropa oil with base lubricant can be used as lubricating oil which would help to reduce the global demand of petroleum based lubricant substantially.[10]

Mohd Fadzli Bin Abdollah et al. studied the effect of gas lubrication on friction behavior of bearing material, which is carbon chromium steel by employing taguchi method. The experiments shows that gas blown to the sliding surfaces in air effectively reduced the coefficient of friction as compared to the air lubrication and the N₂-gas lubrication reduced coefficient of friction by 24%.[11]

Muhamad Noor Harun et al. studied the wear factor based on lubrication performance and found that wear factor was a function of lambda ratio, which was correlated with femoral head size and diametral clearance.[12]

D. Md Razak et al. investigated the influence of lubricant on Acrylonitrile Butadiene Styrene (ABS) curve surface structure (CSS) sliding against ball bearing and used palm oil as lubricant and found that the measured friction using palm oil is lower than the mineral oil. [13]

S.M. Hafis et al. evaluated the effects of minimum quantity lubrication on the deformation of aluminum work piece over a tool and observed the load displacement behavior during the steady state condition and that significant differences exist between lubricant quantity, load-displacement distribution and surface finish of the product was shown.[14]

Mohamad Syahmi Shahrom et al. investigated the Minimum Quantity Lubricant (MQL) and wet machining in milling processes and determined the effect of lubrication conditions on the surface roughness and finally observed that MQL produced better surface finish as compared to wet machining and the result can significantly reduce cost and environmental pollution. [15]

Mohamad Ali Ahmad et al. determined the effect of oil supply pressure at different oil groove positions on torque and frictional force in hydrodynamic journal bearing and found that oil supply pressure and groove positions had affected the frictional force and torque in journal bearing.[16]

Flávia Aparecida de Almeida et al. studied the wear and friction behavior of self-mated silicon nitride pairs in lubricated ball-on-flat reciprocating sliding conditions using diesel fuel and soy- bean biodiesels as lubricants and found that the friction coefficient is considerably higher for the diesel fuel than for biodiesels and observed that the wear mechanisms were mainly mechanically dominated.[17]

Ibrahim Deiab et al. observed the effect of six different strategies on the flank tool wear, surface roughness and energy consumption during turning of titanium Ti-6Al-4V using uncoated carbide tool at certain speed and feed and found that the use of rapeseed vegetable oil in MQL and MQCL configuration turns out to be an overall sustainable alternative and the use of vegetable oil as a lubricant for machining.[18]

Kedare S. B. et al. studied the effects of three parameters, namely, cutting speed, feed and depth of cut upon Surface Finish during milling operation and found that the

surface finish was improved by 27% and also showed that MQL may be considered to be an economical and environmentally compatible lubrication technique.[19]

Jayaseelan.V et al. analyzed that when friction occurs between tool and work piece fractionize with each other, surface expansion and high normal pressure occurs even at elevated contact temperature between work piece and die, which leads to adhesions (cold-weld), abrasion of die and work material and a lubricant is used to reduce the friction and determined the frictional factor for both un-lubricated and lubricated conditions.[20]

Paolo C. Priarone et al. studied the influence of the lubrication strategy on tool wear, surface quality and environmental impact when milling and turning Ti-48Al-2Cr-2Nb (at. %) intermetallic alloys and found that dry machining requires a sensible reduction of process parameters to preserve a stable process, although limiting the energy consumption and reducing to zero the lubricant consumption.[21]

Bruce L. Tai et al. summarizes the advancements and challenges of minimum quantity lubrication (MQL) technology in automotive powertrain machining, they observed that Elimination of coolant systems creates significant saving from energy and equipment, the flexibility to relocate the machines, reduction of waste stream and floor space, and a cleaner and healthier work environment.[22]

J. Fleischer et al. studied a methodology for reducing the energy demand and increasing the lifetime of ball screws by minimizing the friction torque with adaptive lubrication and deals with the lifetime of ball screws with standard lubrication and new adaptive lubrication

aims at proving the increase of the lifetime.[23]

Zhang Dongkun et al. studied that nanoparticles with the anti-wear and friction reducing features were applied as cooling lubricant in the grinding fluid and found that the specific grinding energy and the work piece surface roughness initially increased and then decreased as MoS₂ nanoparticle volume concentration increased and satisfactory grinding surface lubrication effects were obtained with 2% MoS₂ nanoparticle volume concentration.[24]

V. García Navas et al. observed that the high strength alloys are difficult to machine due to the high temperatures generated during cutting so they compared the surface integrity (roughness, hardness, residual stresses and microstructure) generated in AISI 4150 (50CrMo4) steel by dry turning, turning with lubricant (oil based emulsion) and cryogenic turning with LN₂ and found that cryogenic machining is the best solution since it reduces machining problems of heating, leading to tool life improvement and better surface integrity of turned components.[25]

Adil Muminovic et al. studied the mathematical model for solution of lubrication problem in case of mixed friction, i.e. when total contact load of two bodies is partially transmitted through the peaks of roughness of a solid contact, and partly through the pressure generated in the oil film and developed a computer program which enables rapid analysis of tribological parameters at the point of contact of two bodies (the thickness of the oil film, the pressure transmitted by solid body, the pressure transmitted by fluids,

temperature in the oil film) in the function of working conditions parameters.[26]

Takayuki Hama et al. investigated a variation of lubrication condition on die surface during square cup sheet hydroforming and further investigated the difference in the lubrication condition depending on a position on the die surface, some holes were made on the die surface to let the pressure medium flow out through the holes during the process and found that the lubrication condition was different depending on the position on the die surface.[27]

E. A. Rahim et al. experimentally found that the application of MQL based synthetic ester as the cutting fluid was more efficient for the machining process as it reduced the cutting temperature, cutting force, tool-chip contact length and produced better chip thickness compared to dry machining technique.[28]

Gyanendra Singh Goindi et al. observed that the presence of even minute quantities of ionic liquids could significantly affect the machining process through reduction in cutting forces and surface roughness of the machined work piece, as compared to dry cutting, conventional flood-cooled cutting, and MQL machining with neat vegetable oil.[29]

S.Kolahouz et al. studied minimum quantity lubrication as a sustainable lubrication method in machining processes, improved energy consumption, experimental impact, personal health, while enhancing the machining affected zone properties in comparison with floating method.[30]

Mohamed Handawi Saad Elmunafi et al. studied that use of cutting fluids in machining processes can reduce the cutting temperature and provides lubrication to tool and work piece, which increases tool life and improves the surface quality. They used vegetable oil as cutting fluid because of its superior lubrication and high-pressure performance and found that MQL can be a good technique for turning hardened stainless steel using coated carbide cutting tools for cutting parameters.[31]

4. Auto Lube System

Auto lube systems have many advantages over traditional methods of manual lubrication:

- All critical components are lubricated, regardless of location or ease of access.
- Lubrication occurs while the machinery is in operation causing the lubricant to be equally distributed within the bearing and increasing the machine's availability.
- Proper lubrication of critical components ensures safe operation of the machinery.
- Less wear on the components means extended component life, fewer breakdowns, reduced downtime, reduced replacement costs and reduced maintenance costs.
- Measured lubrication amounts mean no wasted lubricant.
- Lower energy consumption due to less friction.

- Increased overall productivity resulting from increase in machine availability and reduction in downtime due to breakdowns or general maintenance.

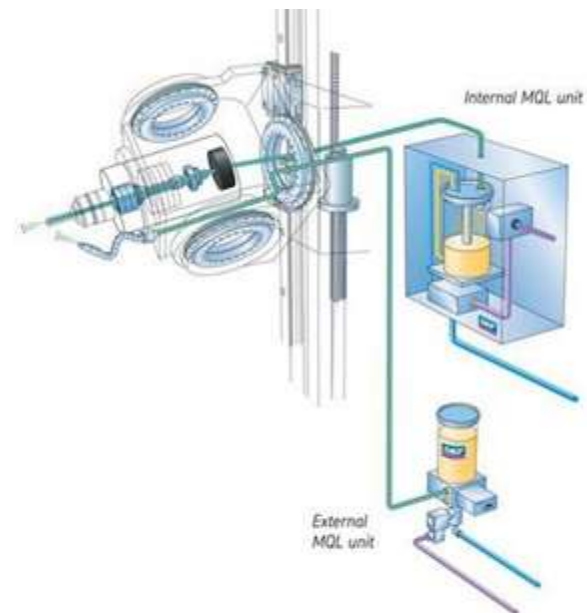


Figure 3: FLOC component for Lubrication

5. Conclusion

The conclusions are MQL shows the better surface roughness compare with wet machining. It increases the availability, performance efficiency and the quality rate, results in improvement of the overall effectiveness. The effects of minimum quantity lubrication during the cold work metal forming process on load-displacement and surface finish of the product were examined and compared. MQL can be a good technique to turning hard stainless steel using coated carbide cutting tools up to 170 m/min and 0.24 mm/rev. It was found to be a more sustainable alternative to synthetic cooling in terms of tool wear, surface quality and cutting energy consumed combined. Also that the booster pumps required for the small flow of vegetable oil and air mixtures are way lighter than the pumping system required for flood cooling

technique. Although flood cooling technique is the more prevalent practice in the industry these days, this study shows that it is feasible to use the sustainable alternative of vegetable oil, especially at feeds and speeds close to 0.1 mm/min and 90 m/min respectively, for Titanium. This means it would be sustainable by default for softer metals and alloys. The application of cooled air as a lubricant also appeared to be effective as presented in the literature. Especially when compared with dry machining, it turns out to be a good alternative. However, machining under MQL seems to be limited by cutting temperature, because at high speed the effect of oil mist becomes evaporated.

Acknowledgment

I am very thankful to my guide who has always helped me. Thanks to my college for providing us the best facilities and environment for research. Special thanks to my father who has always been a source of inspiration for me.

References

1. Hui Xing, Qili Wu, Zhanhua Wu, Shulin Duan, "Elastohydrodynamic Lubrication Analysis of Marine Sterntube Bearing Based on Multi-body Dynamics", 1876-6102 © 2011 Published by Elsevier B.V. Selection.
2. Dallwo Kim, Akemi Ito, Yasuhiro Ishikawa, "Friction Characteristics of Steel Pistons for Diesel Engines", 2012 Brazilian Metallurgical, Materials and Mining Association. Published by Elsevier Editora Ltda. Journal of Materials Research and Technology www.jmrt.com.br J. Mater. Res. Technol. 2012; 1(2):96-102.
3. Danilo de Jesus Oliveiraa, Luiz Gustavo Guermandia, "Improving minimum quantity lubrication in CBN grinding using compressed air wheel cleaning", Journal of Materials Processing Technology 212 (2012) 2559–2568.
4. Salmiah Kasolanga, Mohamad Ali Ahmada, "Preliminary study of Pressure Profile in Hydrodynamic Lubrication Journal Bearing", International Symposium on Robotics and Intelligent Sensors 2012 (IRIS 2012), Procedia Engineering 41 (2012) 1743 – 1749.
5. M. De la Cruz a, W.W.F. Chong," Transient mixed thermo-elastohydrodynamic lubrication in multi-speed transmissions", M. De la Cruz et al./Tribology International 49 (2012) 17–29.
6. Guy Bayada a, Begoña Cid b, Guillermo García b, Carlos Vázquez, "A new more consistent Reynolds model for piezoviscous hydrodynamic lubrication problems in line contact devices", Elsevier, Applied Mathematical Modelling 37 (2013) 8505–8517.
7. X.Y.Donga, Y.L.Qiaoa, Zanga, Q.S.Cui X.Y. Donga*, Y.L.Qia oa, Y.Zanga, Q.S.Cui, "Effect of Ultrasonic Vibration on the Behavior of Antifriction and Wear Resistance of Al2O3/Al2O3 Ceramic Friction Pairs under Oil Lubrication ", Elsevier, X.Y. Dong et al. / Physics Procedia 50 (2013) 449 – 452.
8. Z.H. Nazria, M.Z.M. Rodya,b, Mohd Fadzli Bin Abdollah, "Elastohydrodynamics Lubrication for Bio-Based Lubricants in Elliptical Conjunction", Elsevier Procedia Engineering 68 (2013) 123 – 129, The Malaysian International Tribology Conference 2013, MITC2013.
9. M. Shahabuddin, H.H. Masjuki, M.A. Kalam, "Experimental investigation into tribological characteristics of biolubricant formulated from Jatropha oil", 5th BSME International Conference on Thermal Engineering, Procedia Engineering 56 (2013) 597 – 606.
10. Mohd Fadzli Bin Abdollaha, "Frictional behavior of bearing material under gas lubricated conditions", The Malaysian International Tribology Conference 2013, MITC2013, Elsevier, Procedia Engineering 68 (2013) 688– 693.
11. Muhamad Noor Haruna,, Zhongmin Jinb, Ardiyansyah Syahroma, "Influence of Lubrication Performance on Wear Factor in Metal-on-Metal Hip Joint Replacement using Numerical Analysis", The Malaysian International Tribology Conference 2013, MITC2013, Engineering 68 (2013) 95 – 101.
12. Kapil Sharma, Gaurav Gera, Rajender KumS.M. Hafisa, M.J.M. Ridzuana, Alina Rahayu, "Minimum quantity lubrication in cold work drawing process: Effects on forming load and surface roughness", Elsevier Procedia Engineering 68 (2013) 639 – 646.
13. Mohamad Syahmi Shahrom, "Taguchi Method Approach on Effect of Lubrication

- Condition on Surface Roughness in Milling Operation”, *Elsevier Procedia Engineering* 53 (2013) 594 – 599.
14. Mohamad Ali Ahmad, “The Effects of Oil Supply Pressure at Different Groove Position on Frictional Force and Torque in Journal Bearing Lubrication”, *Malaysian International Tribology Conference 2013 (MITC2013)*, *Elsevier Procedia Engineering* 68 (2013) 70 – 76.
15. Flávia Aparecida de Almeida, “Wear and friction behaviour of Si₃N₄ ceramics under diesel and biodiesel lubrication”, *journal of material research and technology, j mater res technol.* 2013;2(2):110–116.
16. Ibrahim Deiaba, c, Syed Waqar Raza., “Analysis of Lubrication Strategies for Sustainable Machining during Turning of Titanium Ti-6Al-4V alloy”, *ELSEVEIR Social and Behavioral ScienVariety Management in Manufacturing. Systems CIRP* 17 (2014) 766 – 771.
17. Kedare S. B. I, Borse D.R., 2 and Shahane P. T., “Effect of Minimum Quantity Lubrication (MQL) on Surface Roughness of Mild Steel of 15HRC on Universal Milling Machine”, *3rd International Conference on Materials Processing and Characterization (ICMPC 2014)*, *Elsevier Procedia Materials Science* 6 (2014) 150 – 153.
18. Jayaseelan.VI, Kalaichelvan.K2, Vijayan ananth, “Lubrication Effect on Friction Factor of AA6063 in Forward Extrusion Process”, *GLOBAL CONGRESS ON MANUFACTURING AND MANAGEMENT, GCOMM 2014*, *Elsevier Procedia Engineering* 97 (2014) 166 – 171.
19. Paolo C. Priarone a, Matteo Robiglio, “Milling and turning of titanium aluminides by using minimum quantity lubrication”, *5th Machining Innovations Conference (MIC 2014)*, *Elsevier Procedia CIRP* 24 (2014) 62 – 67.
20. Bruce L. Taia, David A. Stephensonb, “Minimum Quantity Lubrication (MQL) in Automotive Powertrain Machining”, *CIRP International Conference on High Performance Cutting, HPC2014*, *Elsevier Procedia CIRP* 14 (2014) 523– 528.
21. J. Fleischer, U. Leberle, J. Maier, A. Spohrer, “Resource-efficient ball screw by adaptive lubricationCIRP Conference on Life Cycle Engineering, *Elsevier Procedia CIRP* 15 (2014) 50 – 55.
22. Zhang Dongkun, Li Changhe , Jia Dongzhou, Zhang Yanbin, Zhang Xiaowei, “Specific grinding energy and surface roughness of nanoparticle jet minimum quantity lubrication in grinding”, *Chinese Society of Aeronautics and Astronautics & Beihang University Chinese Journal of Aeronautics, CSAA* 2014,28(1): 570-581.
23. V. García Navasa, D. Fernández, “Surface integrity of AISI 4150 (50CrMo4) steel turned with different types of cooling-lubrication”, *Conference on Surface Integrity (CSI)*, *Elsevier Procedia CIRP* 13 (2014) 97 – 102.
24. Adil Muminovic, Nedzad Repcic, Mirsad Colic, “Thermo Elasto Hydrodynamic Lubrication Model of Mixed Friction”, *Elsevier Procedia Engineering* 69 (2014) 49 – 56.
25. Takayuki Hama, Keisuke Kojima, Yoshihiko Nishimura, “Variation of lubrication condition during sheet hydroforming”, *International Conference on Technology of Plasticity, ICTP 2014, 19-24 October 2014*, *Elsevier Procedia Engineering* 81 (2014) 1029 – 1034.
26. E. A. RahimI,a, M. R. IbrahimI,b, A. A. RahimI, “Experimental Investigation of Minimum Quantity Lubrication (MQL) as a Sustainable Cooling Technique”, *Elsevier Procedia CIRP* 26 (2015) 351 – 354.
27. Gyanendra Singh Goindia, Santosh Namdeo Chavanb, “Investigation of ionic liquids as novel metalworking fluids during minimum quantity lubrication machining of a plain carbon steel”, *Elsevier Procedia CIRP* 26 (2015) 341–345.
28. S.Kohladouz, M.Hadi, “Investigation of surface integrity in high speed milling of gamma titanium aluminide under dry and minimum quantity lubricant conditions”, *Elsevier Procedia CIRP* 26 (2015) 367 – 372.
29. Mohamed Handawi Saad Elmunafti, D. Kurniawan, M.Y. Noordin, “Use of Castor Oil as Cutting Fluid in Machining of Hardened Stainless Steel with Minimum Quantity of Lubricant”, *Elsevier Procedia CIRP* 26 (2015) 408 – 411.
30. De Boer, Gregory Nicholas, “A two-scale approach to elasto-hydrodynamic lubrication”, 2015. Champion, James, “Use of computational fluid dynamics to improve the layer thickness control of polyester based multilayered films”, *Eng.D. Thesis, University of Birmingham*, 2015.